


超薄型LED投光器

TM-FL-06-G2



動作温度:-40°C~50°C

保存温度:-40°C~80°C



選択オプション

消費電力	色温度	照射角度
30W	5700K	120° × 90°
50W	3000K※特注	120° × 65° ※特注
80W	4000K※特注	60° ※特注
100W		
150W		
200W		

使用範囲



倉庫、工場、看板、街路灯、ナイター照明、アッパーライト など

投光器型水銀灯器具の代替交換に最適

仕様


品番	消費電力	発光効率	LEDチップ	CRI	重量	照射角度
TM-FL30W-06-G2	30W	130lm/W	LUMILEDS 3030	> 80	1.57kg	120°90°/120°65°/60°
TM-FL50W-06-G2	50W	130lm/W	LUMILEDS 3030	> 80	1.57kg	120°90°/120°65°/60°
TM-FL80W-06-G2	80W	130lm/W	LUMILEDS 3030	> 80	3.50kg	120°90°/120°65°/60°
TM-FL100W-06-G2	100W	130lm/W	LUMILEDS 3030	> 80	3.50kg	120°90°/120°65°/60°
TM-FL150W-06-G2	150W	130lm/W	LUMILEDS 3030	> 80	5.31kg	120°90°/120°65°/60°
TM-FL200W-06-G2	200W	130lm/W	LUMILEDS 3030	> 80	5.31kg	120°90°/120°65°/60°

寸法図

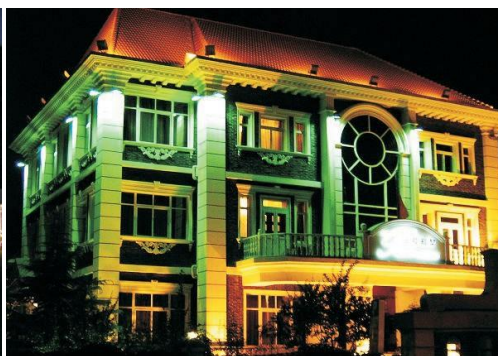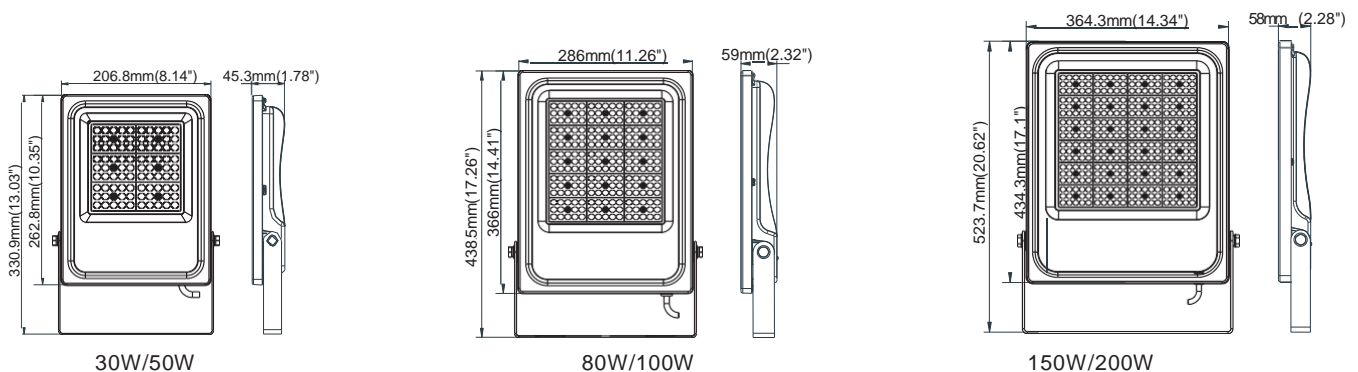

TM-FL-06-G2


配光図

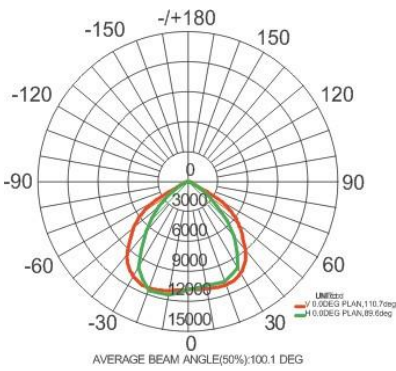

120°×90°




30W/50W

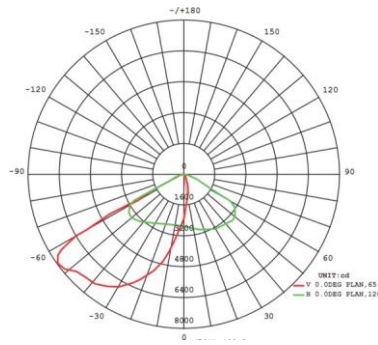

120°×65°



80W/100W

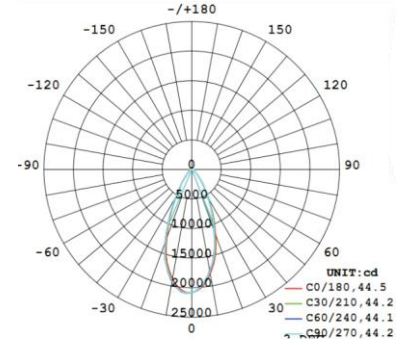

60°



150W/200W

取付方法

01

02

Power	D1	D2
50W	150mm	10mm
120W	180mm	12mm
200W	180mm	12mm

03

04

05

Brown --- L
 Blue --- N
 G/Y --- GND

L N GND

225° ✓

225° ✓

✗ ⚠

✗ ⚠