

超薄型LED投光器

TM-FL-06-G3



 IP65 防水性能

 AC100-277V 50/60Hz

 簡単工事

 130lm/W

動作温度:-40°C~50°C

保存温度:-40°C~80°C

選択オプション

消費電力

10W
20W

色温度

5700K
3000K※特注
4000K※特注

照射角度

120° × 90°
120° × 65° ※特注
60° ※特注



使用範囲


倉庫、工場、看板、街路灯、ナイター照明、アッパーライト など

投光器型水銀灯器具の代替交換に最適

仕様

品番	消費電力	発光効率	LEDチップ	CRI	重量	照射角度
FL10W-06-G3	10W	130lm/W	LUMILEDS 3030	> 80	0.62kg	120°×90°/120°×65°/60°
FL20W-06-G3	20W	130lm/W	LUMILEDS 3030	> 80	0.62kg	120°×90°/120°×65°/60°

寸法図




10W/20W




TM-FL-06-G3


配光図

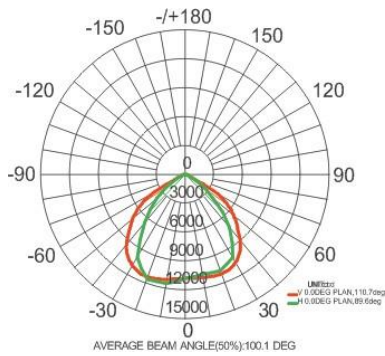

120°90°

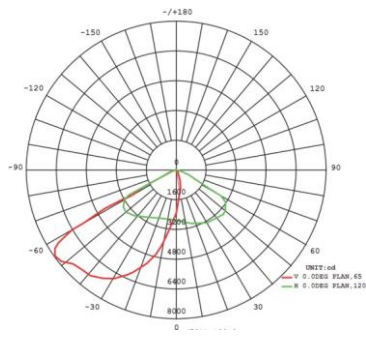

120°65°

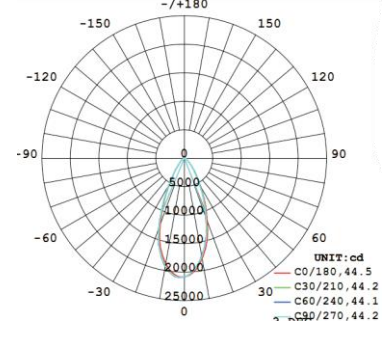

60°



10W/20W

取付方法

01

02

POWER	D1	D2
10W,20W	75mm	6mm

03

04

05

Brown - L
Blue --- N
G/Y --- GND

L N GND