

LEDスポーツ照明(完全受注生産)

TM-FL-07-G8



Better solutions for Led Flood Light



IP66 防水性能



AC100-277V 50/60Hz



簡単工事



150Lm/W

動作温度: -40℃ ~ +50℃

保存温度: -40℃ ~ +80℃

選択オプション

消費電力

400W 800W 1500W
500W 1000W 1800W
600W 1200W

色温度

3000K
4000K
5000K
5700K

照射角度

30°
60°
90°
T2(117°34°)

使用範囲

スタジアム/スポーツ競技場

工場・倉庫

駐車場

標準付属品



10KV SPD(避雷器)



防水コネクターケース
※800W以上のみ



グレア防止カバー






レーザーポインター(エイミングポジション設定)
※1ロットにつき1つ



仕様




品番	消費電力	発光効率	LEDチップ	演色性	重量	照射角度
TM-FL400W-07-G8	400W	150Lm/W	SMD5050	>70	17.0kg(37.5lbs)	30°/60°/90°/T2
TM-FL500W-07-G8	500W	150Lm/W	SMD5050	>70	17.0kg(37.5lbs)	30°/60°/90°/T2
TM-FL600W-07-G8	600W	150Lm/W	SMD5050	>70	19.5kg(43.0lbs)	30°/60°/90°/T2
TM-FL800W-07-G8	800W	150Lm/W	SMD5050	>70	32.5kg(71.7lbs)	30°/60°/90°/T2
TM-FL1000W-07-G8	1000W	150Lm/W	SMD5050	>70	32.5kg(71.7lbs)	30°/60°/90°/T2
TM-FL1200W-07-G8	1200W	150Lm/W	SMD5050	>70	36.5kg(80.5lbs)	30°/60°/90°/T2
TM-FL1500W-07-G8	1500W	150Lm/W	SMD5050	>70	46.5kg(103lbs)	30°/60°/90°/T2
TM-FL1800W-07-G8	1800W	150Lm/W	SMD5050	>70	54.0kg(119lbs)	30°/60°/90°/T2

寸法図(mm)

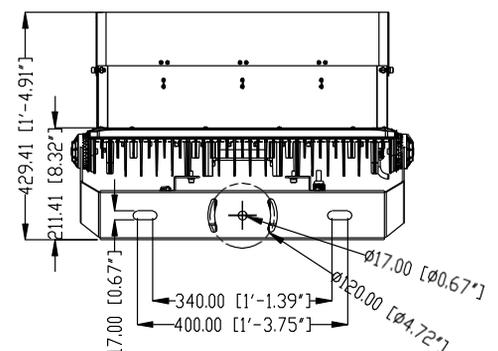

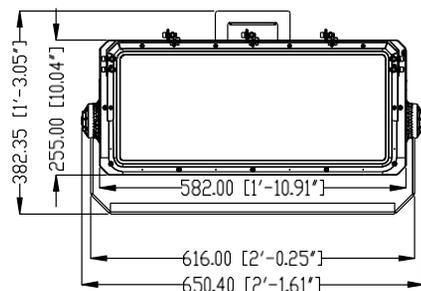


400W/500W/600W

TM-FL-07-G8

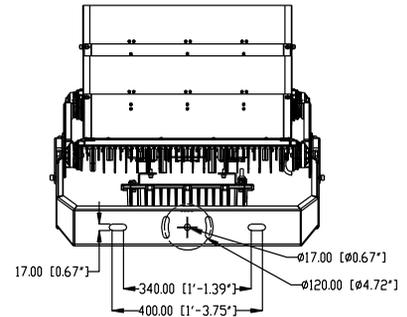

800W/1000W/1200W

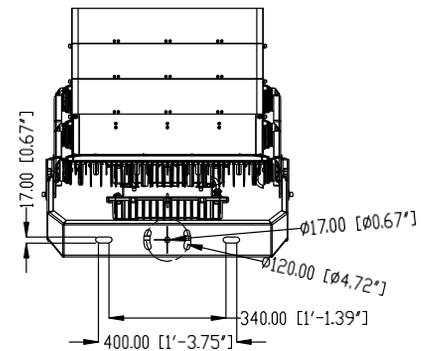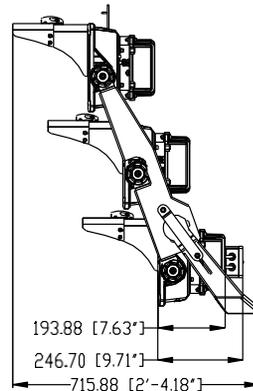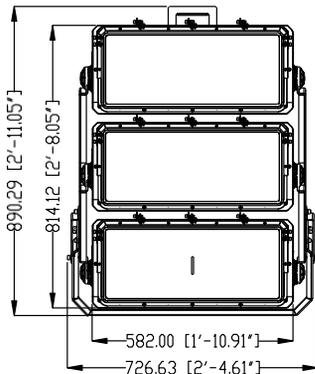

1500W/1800W

モデルオプション



400W/500W/600W




800W/1000W/1200W




1500W/1800W


配光図

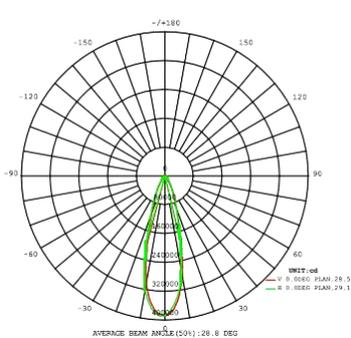


30°



60°

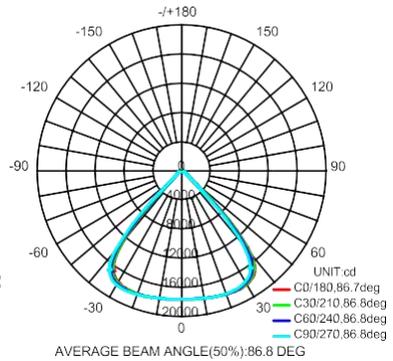

90°




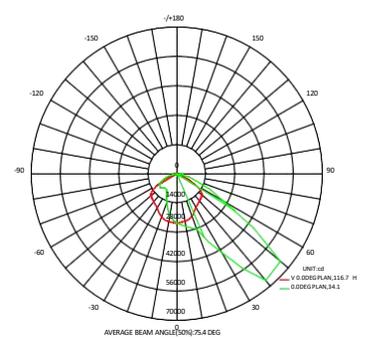


T2(117*34°)

TM-FL-07-G8



取付方法

<p>01</p>  <p>M16*45mm</p>	<p>02</p>  <table border="1" data-bbox="324 1159 422 1193"> <tr> <th>D1</th> <th>D2</th> </tr> <tr> <td>17mm</td> <td>370mm</td> </tr> </table>	D1	D2	17mm	370mm	<p>03</p> 	<p>04</p> 	<p>05</p> 
D1	D2							
17mm	370mm							
<p>Brown(Black) ---L Blue(White) ---N Green/Yellow ---GND</p> 	