

高天井用LED照明

TM-HBL-02-G10



Better solutions for a Led Highbay Light

-  IP65 防水性能
-  AC100-277V 50/60Hz
-  簡単工事
-  140lm/W
- 動作温度: -40℃~+50℃
- 保存温度: -40℃~+80℃

選択オプション

消費電力	色温度	照射角度
80W	5700K	120°
100W	3000K※特注	90° ※特注
120W	4000K※特注	60° ※特注
150W		
200W		
240W		

使用範囲

倉庫、工場、体育館、展示場 など
吊下式水銀灯器具の代替交換に最適


付属品



仕様

品番	消費電力	発光効率	LEDチップ	演色性	重量	照射角度
TM-HBL80W-02-G10	80W	140lm/W	LUMILEDS 3030	> 80	3.30kg	90°/120°/60°
TM-HBL100W-02-G10	100W	140lm/W	LUMILEDS 3030	> 80	3.30kg	90°/120°/60°
TM-HBL120W-02-G10	120W	140lm/W	LUMILEDS 3030	> 80	3.30kg	90°/120°/60°
TM-HBL150W-02-G10	150W	140lm/W	LUMILEDS 3030	> 80	3.30kg	90°/120°/60°
TM-HBL200W-02-G10	200W	140lm/W	LUMILEDS 3030	> 80	5.40kg	90°/120°/60°
TM-HBL240W-02-G10	240W	140lm/W	LUMILEDS 3030	> 80	5.40kg	90°/120°/60°


寸法図

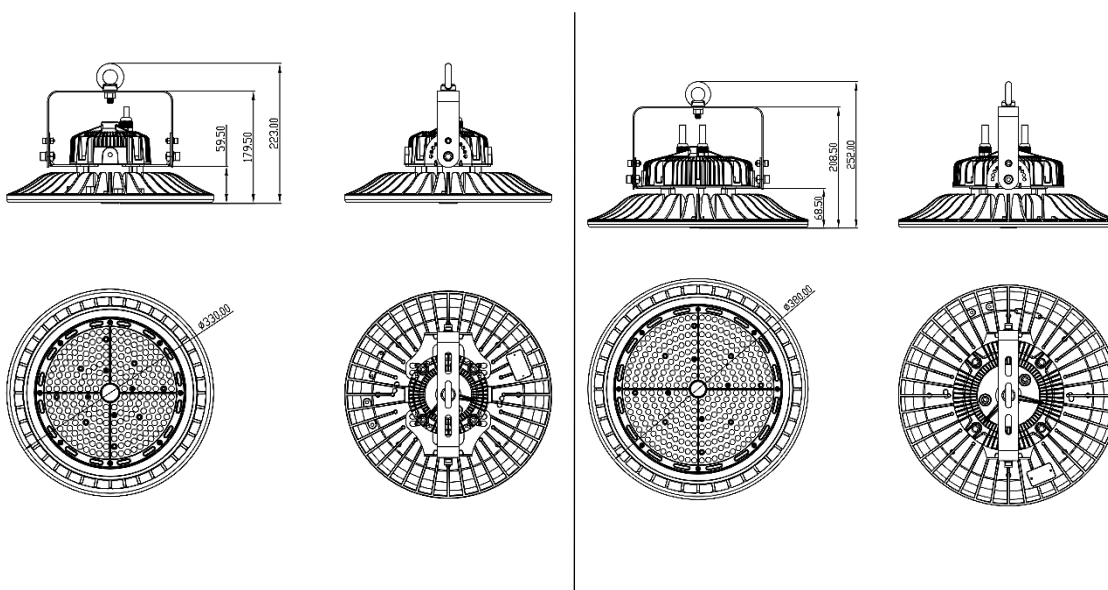

80W,100W,120W,150W

200W,240W

配光図

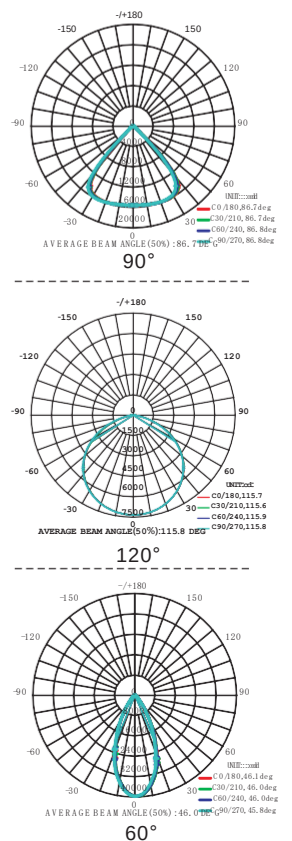

TM-HBL-02-G10



取付方法



1

Power	D1
100W	10mm
150W	10mm
200W	10mm
240W	10mm

2

3

Brown(Black)--- L
 Blue(White)--- N
 G/Y(Green)-- GND



1

Power	D1	D2
100W	100mm	12mm
150W	100mm	12mm
200W	100mm	12mm
240W	100mm	12mm

2

3

Brown(Black)--- L
 Blue(White)--- N
 G/Y(Green)-- GND