

口金E39形高天井用LED照明

TM-HBL-02-G7



IP65 防水性能

AC100-277V 50/60Hz

簡単工事

180lm/W

動作温度: -20°C~+50°C

保存温度: -40°C~+80°C

AL1070純アルミ (冷間鍛造技術)



選択オプション

消費電力

60W
80W
100W
120W

色温度

3000K ※特注
4000K ※特注
5700K

照射角度

90°

使用範囲

倉庫、工場、体育館、展示場 など
吊下式水銀灯器具の代替交換に最適

付属品




落下防止ワイヤー


仕様

品番	消費電力	発光効率	LEDチップ	演色性	重量	照射角度
TM-HBL60W-02-G7	60W	180lm/W	SMD5050	> 70	1.52kg	90°
TM-HBL80W-02-G7	80W	180lm/W	SMD5050	> 70	1.52kg	90°
TM-HBL100W-02-G7	100W	180lm/W	SMD5050	> 70	1.52kg	90°
TM-HBL120W-02-G7	120W	180lm/W	SMD5050	> 70	1.64kg	90°

寸法図 (mm)

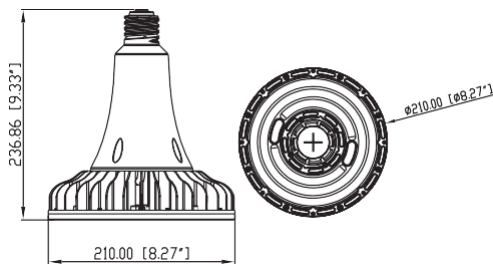


60W/80W/100W

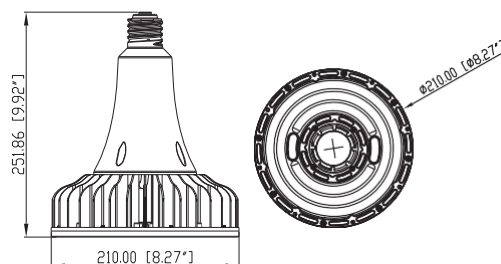

120W

配光図

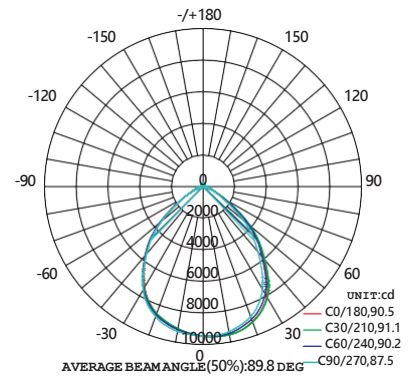

TM-HBL-02-G7



60W/80W/100W



120W

取付方法

