

LEDスポーツ照明(完全受注生産品)

TM-FL-07-G11



動作温度:-40℃~50℃

保存温度:-40℃~80℃



選択オプション

消費電力

200W 400W 700W 1000W
240W 500W 900W 1200W
300W 600W

色温度

5700K
5000K
3000K
4000K

照射角度

10°
15°
30° 60° 90°
T2(117×34°)

使用範囲

スタジアム/スポーツ競技場


グラウンド 広場

工場・倉庫・駐車場

オプション品



10KV SPD(避雷器)
※400W以上は標準搭載



防水コネクターケース
※400W以上は標準搭載



グレア防止カバー




レーザーポインター
※照射向き調整時に使用



仕様

品番	消費電力	発光効率	LEDチップ	CRI	重量	照射角度
TM-FL200W-07-G11	200W	110Lm/W 120Lm/W 140Lm/W	SAMSUNG 3535 SMD 5050	>70	8.5kg(18.7lbs)	10° 15° 30°/60°/90°/T2
TM-FL240W-07-G11	240W	110Lm/W 120Lm/W 140Lm/W	SAMSUNG 3535 SMD 5050	>70	8.5kg(18.7lbs)	10° 15° 30°/60°/90°/T2
TM-FL300W-07-G11	300W	120Lm/W 140Lm/W	SAMSUNG 3535 SMD 5050	>70	8.8kg(19.4lbs)	15° 30°/60°/90°/T2
TM-FL400W-07-G11	400W	110Lm/W 120Lm/W 140Lm/W	SAMSUNG 3535 SMD 5050	>70	19.0kg(41.8lbs)	10° 15° 30°/60°/90°/T2
TM-FL500W-07-G11	500W	110Lm/W 120Lm/W 140Lm/W	SAMSUNG 3535 SMD 5050	>70	19.0kg(41.8lbs)	10° 15° 30°/60°/90°/T2
TM-FL600W-07-G11	600W	120Lm/W 140Lm/W	SAMSUNG 3535 SMD 5050	>70	19.7kg(43.4lbs)	15° 30°/60°/90°/T2
TM-FL700W-07-G11	700W	110Lm/W 120Lm/W 140Lm/W	SAMSUNG 3535 SMD 5050	>70	25.0kg(55.1lbs)	10° 15° 30°/60°/90°/T2
TM-FL900W-07-G11	900W	120Lm/W 140Lm/W	SAMSUNG 3535 SMD 5050	>70	26.0kg(57.3lbs)	15° 30°/60°/90°/T2
TM-FL1000W-07-G11	1000W	110Lm/W 120Lm/W 140Lm/W	SAMSUNG 3535 SMD 5050	>70	31.0kg(68.3lbs)	10° 15° 30°/60°/90°/T2
TM-FL1200W-07-G11	1200W	120Lm/W 140Lm/W	SAMSUNG 3535 SMD 5050	>70	32.5kg(71.7lbs)	15° 30°/60°/90°/T2


寸法図(mm)



200W/240W/300W




400W/500W/600W





TM-FL-07-G11


LEDスポーツ照明

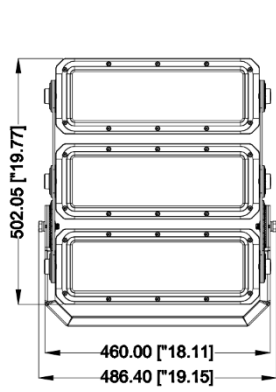







700W/900W

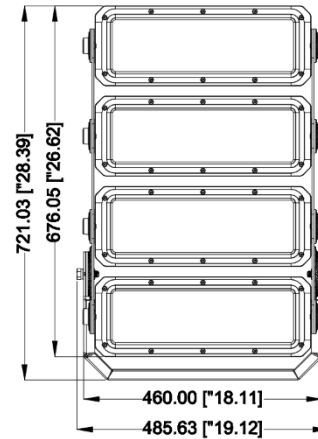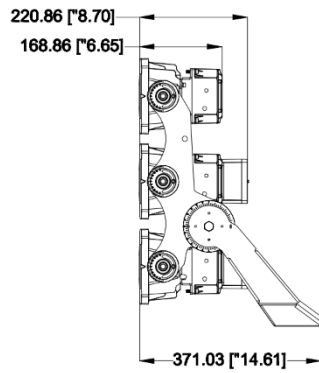

1000W/1200W

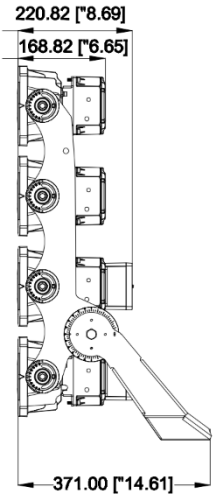

配光図

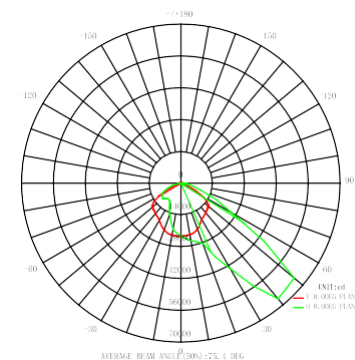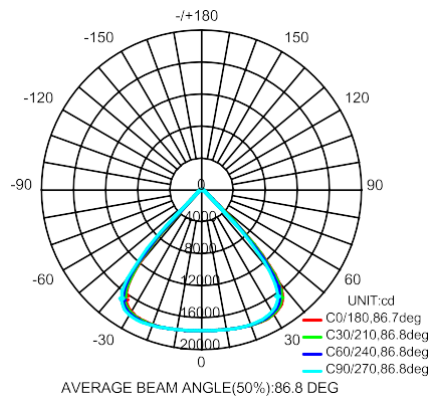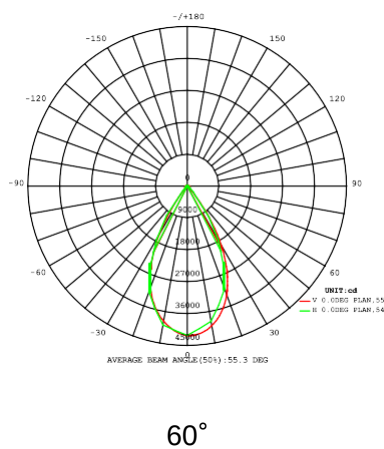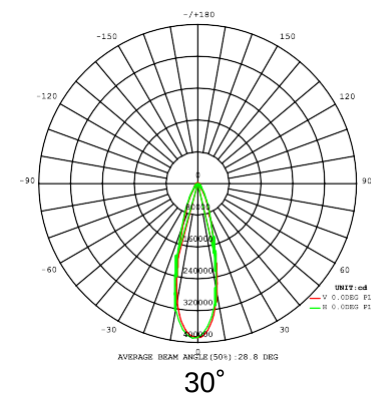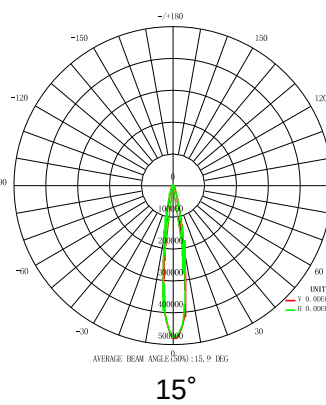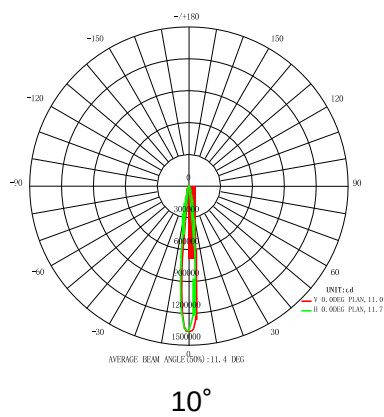

TM-FL-07-G11

モデルオプション



200W/240W/300W



400W/500W/600W



700W/900W



1000W/1200W


取付方法

01




M16*45mm

02




Power	D1	D2	L1	L2	L3
300W	12.5mm	12.5mm	35mm	235mm	
600W	17mm	17mm	50mm	250mm	120mm
900W	17mm	17mm	50mm	250mm	120mm
1200W	17mm	17mm	50mm	250mm	120mm


03




04




05




Brown(Black) — L
Blue(White) — N
Green/Yellow — GND



Rotatable ±30°



Caution:
Vertical installation is absolutely not permitted



Caution: When the angle of the luminous surface exceeds 90°, the lamp power is reduced by 20%.

